

M844E
Art. NR. :52660
PO: 1528/ 1529

MOBILE SAFE





Instructions manual

Thank you for purchasing our mobile safe. It will allow you to protect your valuables safely. Thanks to its internal protective padding, the contents of the safe will be preserved from any damage during transport. You could take it anywhere whether you are traveling, go to the beach or go to play sports.

PLEASE READ THIS INSTRUCTIONS MANUAL CAREFULLY AND KEEP IT FOR FUTURE REFERENCE. DO NOT STORE IT IN THE MOBILE SAFE IN ORDER TO HAVE IT AVAILABLE IF NEEDED. IF YOU ENTRUST IT TO A THIRD PARTY, PLEASE ALSO PASS ON THIS INSTRUCTIONS MANUAL.

PRODUCT DESCRIPTION

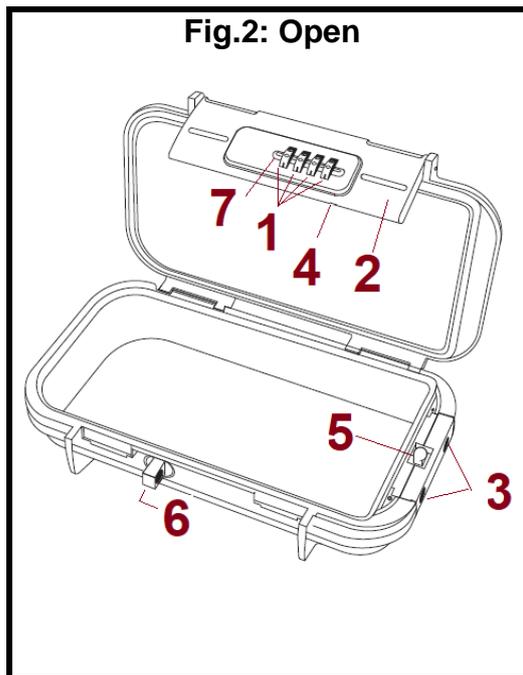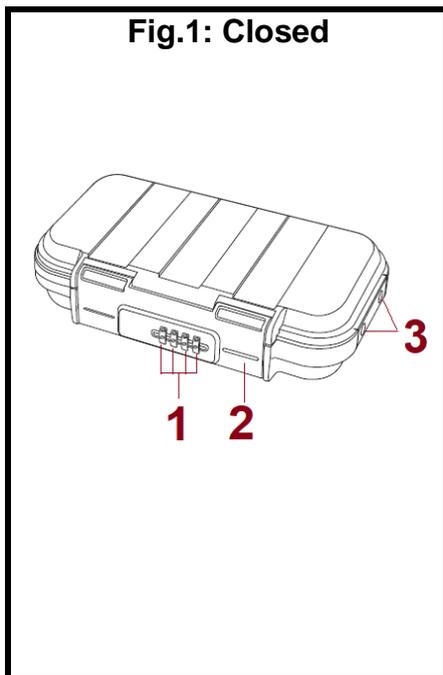


1. Wheel (x4) for setting the number combination
2. Locking flap
3. Holes for inserting the ends of the fixing cable
4. Lever for resetting and confirming the code (under the locking flap)
5. Button to unlock the cable stop heads
6. Locking latch
7. Guide line for aligning the numbers

USING THE COMBINATION LOCK

How to reset the code?

1. When using for the first time, the default code is 0-0-0-0. Turn the four wheels, locating on the locking flap, to the "0" position, then open the safe.
2. Using your finger, push the reset lever to the left and then slide it down, it will then move from position "A" to "B".
3. Turn the dials, one after the other, to set the new number combination. Note: The numbers must be aligned correctly on the guide line.
4. Once you have finished setting the code, use the tip of your thumb or insert the tip of a screwdriver under the reset button to push it upwards. It will move from "B" position to "A". The set code is locked.

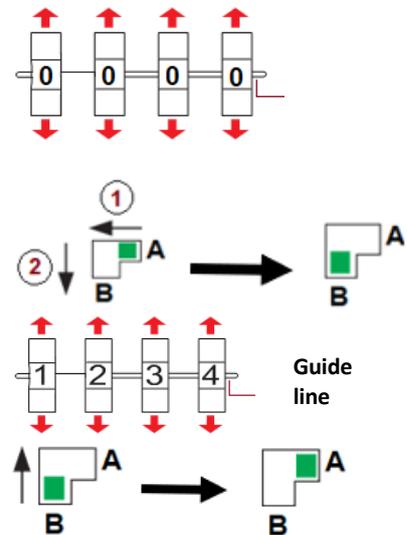

Note: We recommend that you write down this combination number or take a photo of it after resetting the code or creating a new code. You will need to set it each time you open the safe or perform a reset.

Creating a new code

1. Turn the wheels to display the code to open the safe.
2. Move the reset lever from position "A" to "B".
3. Use the wheels to set the new code.
4. Push the reset lever up: from "B" to "A". The new number combination is now saved. The safe can only be opened with this number combination.

IMPORTANT NOTE, PLEASE NOTE:


Due to the airtightness of the safe, it may be difficult to open it despite the correct combination of numbers. This is indeed due to the formation of vacuum inside the safe, which can seal the box and lid tightly together. To open it, simply give a few light taps in the center of the lid of the box. This will allow air to enter the safe, break and release the vacuum.

It can then be opened with the correct number combination by opening the locking flap.

INSERTING AND REMOVING THE FIXING CABLE

Inserting the stop heads


The fixing cable can be installed on the right side of the safe. The fixing cable has a stop head on each side, at its ends. Simply insert them into the corresponding holes (3), on the safe. Once properly inserted, you will hear a click, indicating the locking of the head.



Removing the stop heads

First, you need to open the safe and locate the unlock button, which is on the right side.

While pushing the release button in the direction where the cable stop head to be removed is inserted, remove it. Do the same for the other stop head. See the illustrations below.

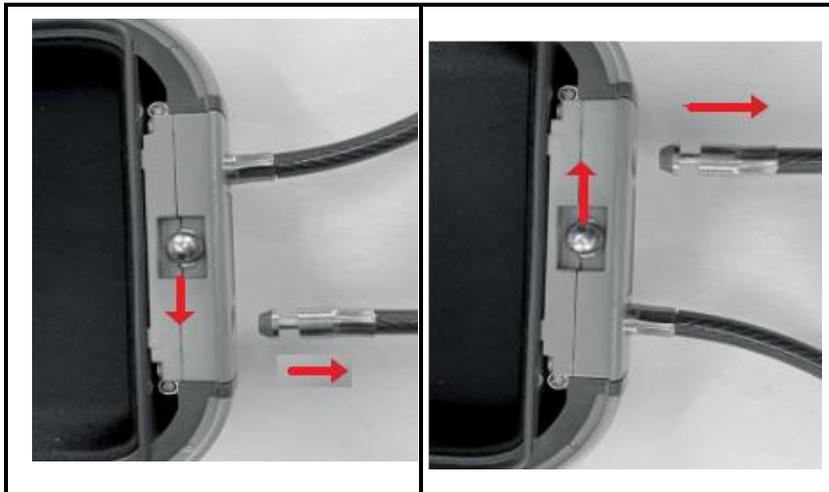

Thanks to this solid fixing cable, the mobile safe can be fixed anywhere safely (leg of a chair, of a table, etc.).

CLEANING AND MAINTENANCE

- **DO NOT USE ABRASIVE CLEANERS OR CHEMICALS.**
- Clean with a soft, dry, lint-free cloth. If dirty, use a slightly damp cloth and dry thoroughly.

Imported by EML - PRODIS
1, rue de Rome 93110 Rosny-sous-Bois
France - qualite2@prodis.net

Made in P.R.C.

Marketed by EUROTOPS VERSAND GMBH D-40764 LANGENFELD, Germany